




**EXCEPTIONAL
PROTECTION**

**OUTSTANDING
VALUE**



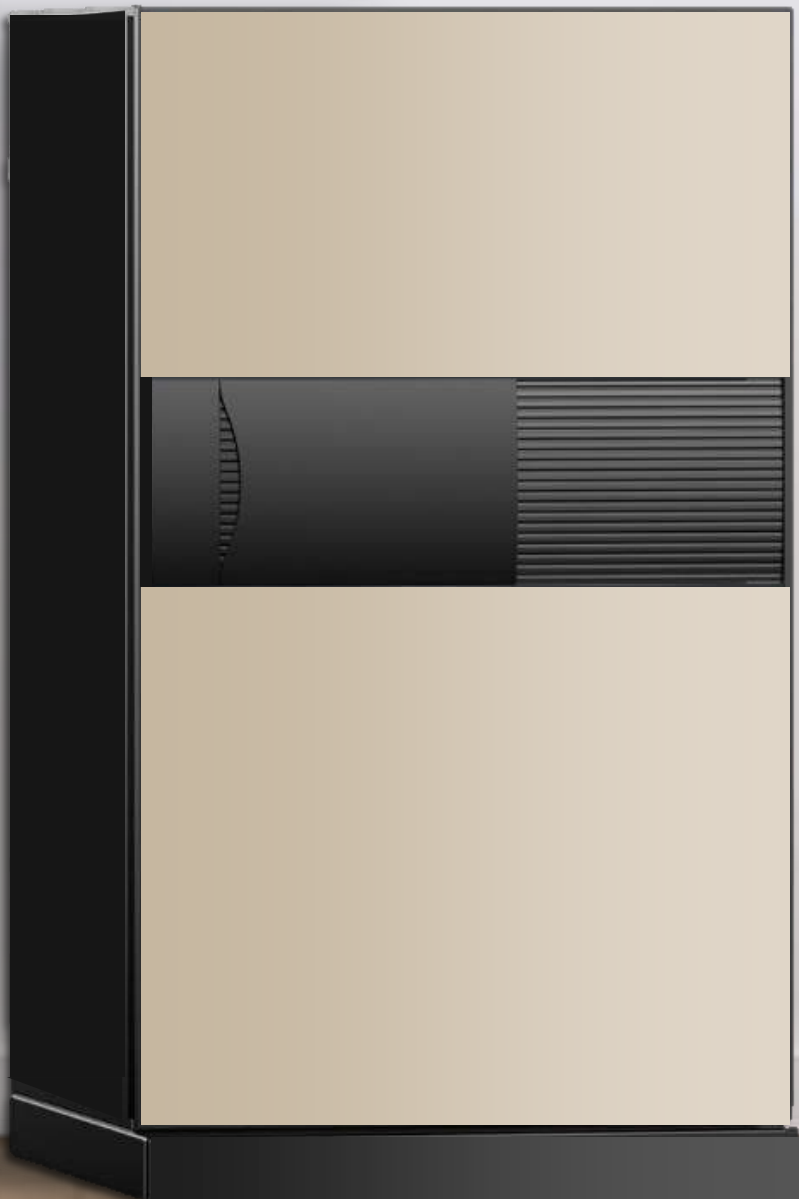

Security-Rated and Fire-Rated Safes




Safes with Security Level S1 and S2 have been tested according to European Standard EN14450, and are certified to have passed these standards.

LUX SERIES

MODEL	LOCK TYPE	SECURITY LEVEL	FIRE RATING	CAP cu.ft	WT kg	EXTERNAL DIMENSIONS H x W x D (inch)
LUX 700*	Biometric + electronic	S2	1 ½ hr	2.3	140	28.1 x 20.2 x 21.7
LUX 900*	Biometric + electronic	S2	1 ½ hr	3.1	170	36.0 x 20.2 x 21.7


Available in black, cream or beige

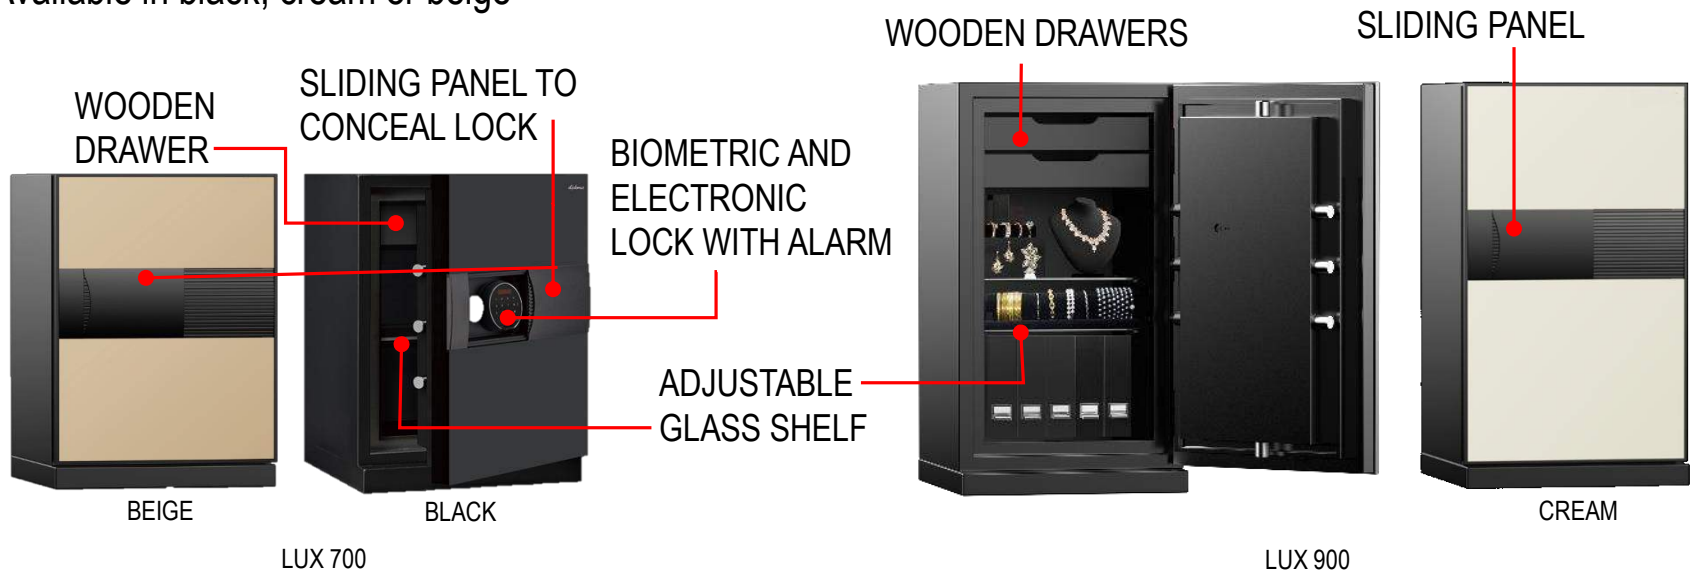

PRO SERIES

MODEL	LOCK TYPE	SECURITY LEVEL	FIRE RATING	CAP cu.ft	WT kg	EXTERNAL DIMENSIONS H x W x D (inches)
PRO 60M	Manual lock + key	S1	1½ hr	3.0	122	32.1 x 20.5 x 20.5
PRO 60D	Digital lock + key	S1	1½ hr	3.0	122	32.1 x 20.5 x 20.5
PRO 70M*	Manual lock + key	S1	2 hr	4.6	201	37.8 x 25.8 x 22.0
PRO 70D*	Digital lock + key	S1	2 hr	4.6	201	37.8 x 25.8 x 22.0
PRO 80M	Manual lock + key	S1	2 hr	5.7	228	45.7 x 25.8 x 22.0
PRO 80D	Digital lock + key	S1	2 hr	5.7	228	45.7 x 25.8 x 22.0
PRO 95M*	Manual lock + key	S1	2 hr	13.4	388	64.2 x 30.5 x 25.6
PRO 95D*	Digital lock + key	S1	2 hr	13.4	388	64.2 x 30.5 x 25.6
PRO 100M*	Manual lock + key	S1	2 hr	24.6	540	66.3 x 44.3 x 27.6
PRO 100D*	Digital lock + key	S1	2 hr	24.6	540	66.3 x 44.3 x 27.6

*Indent order, up to 12 weeks lead time

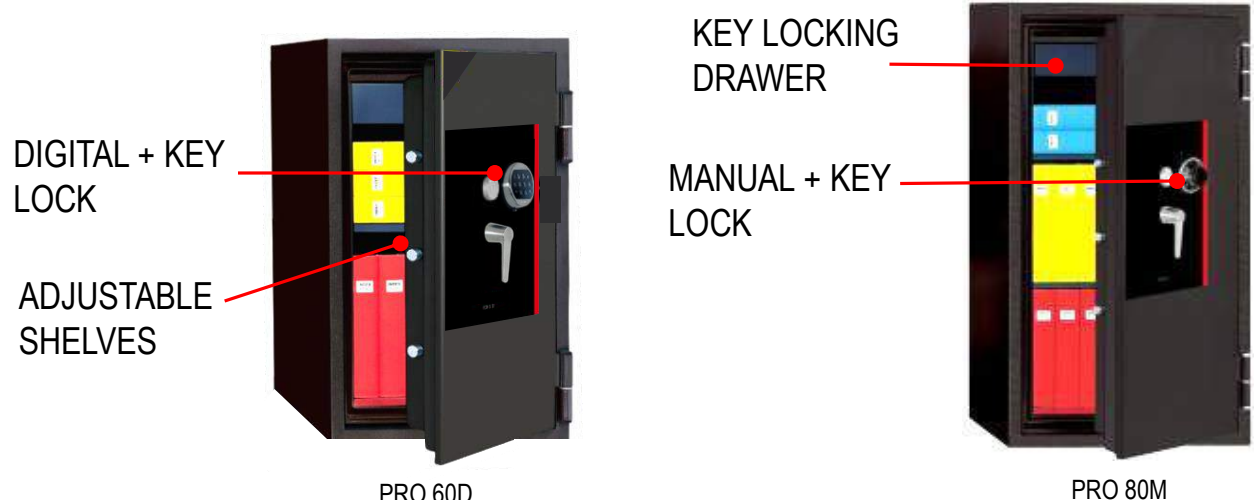



LONG GUN/EXECUTIVE SAFES

MODEL	GUNS	LOCK TYPE	FIRE RATING	CAP cu.ft	WT kg	EXTERNAL DIMENSIONS H x W x D (inches)
G0135	5	8 Lever Key	-	3.5	32	55.0 x 12.0 x 11.5
G1055E	10	Digital, override key	-	6.2	56	55.1 x 17.0 x 16.3
GM1459E*	14	Digital, override key	½ hr	11.0	156	59.0 x 22.8 x 23.6
GM2459E*	24	Digital, override key	½ hr	14.2	201	59.0 x 28.3 x 24.3
GM3659E*	36	Digital, override key	½ hr	22.6	236	59.0 x 38.0 x 26.8

*Can be configured as an Executive Safe

- ✓ Meets California DOJ Firearm Safety Standards
- ✓ Meets Philippine Firearm Regulation Act RA 10591



8 LEVER
KEY LOCK

SOLID
STEEL

G0135



DIGITAL
LOCK

4-WAY
ADJUSTABLE
CONFIGURATION
(EXECUTIVE SAFE)

GM2459E

The information in this brochure is subject to change without notice. Errors and omissions excepted.

ZENOREX
Marketing Corporation



CUSTOMER SERVICE



8893-7610



customerservice@zenorexmarketing.com



SentrySafe Customer Service
0920-974-4439



We are online
Monday-Friday 7:30am – 4:30pm