




SMART WI-FI INTERCONNECTED MINI SMOKE ALARM with BASE STATION XS01-M smoke alarm

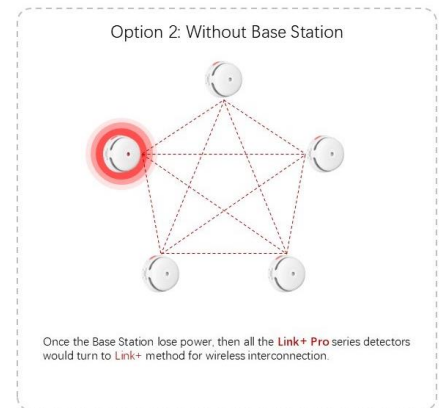

Mini Smoke Alarm with Replaceable Lithium Battery and Test/Silence Button, Smart Fire Detector, Auto Self-Check Function, Conforms to UL 217 Standard.

XS01-M may be connected to Base Station SBS50 to receive app notifications, or may be wirelessly interconnected with other Link units, including XS01-WR and RC01 Pro.

FEATURES

- Advanced photoelectric sensor
- When connected to base station
 - Easy app installation
 - Receive real-time notifications on your phone
 - An alarm that is triggered alerts the base station; the base triggers all other connected alarms and sends a notification to the app
- When wirelessly connected (without base station)
 - Can be connected to up to 24 Link units (including XS01-WR and RC01 Pro)
 - When one alarm is triggered, all will sound
- High capacity 5-year replaceable battery
- Certified by TÜV Rheinland, global leader in independent inspection services, to meet European Standard EN 14604 for smoke detectors
- High performance STMicroelectronics microcontroller
- Fire retardant ABS plastic material
- Simple 2-step installation
- Mounting hardware included
- 5-Year Warranty

TECHNICAL SPECIFICATIONS

Power Source	Replaceable 3 V CR123A lithium battery
Sensor Type	Photoelectric
Safety Standards	EN 14604:2005+AC:2008
Coverage Area	20-40 m ²
Best Operating Temperature	40-100 °F (4.4-37.8 °C)
Operating Relative Humidity	≤ 85% RH (non-condensing)
Alarm Loudness	≥85 dB at 10 ft (3 m)
Silence Duration	About 9 minutes
Operating Life	10 years
Battery Life	5 years
Max Interconnected Units	24 wireless units (only compatible with X-Sense Link)
Connection Distance (open air)	1,640 ft (500 m)
Dimensions	3.0 x 3.0 x 1.9 in (78 x 78 x 48 mm)
Weight	0.2 lb (91 g)

*Features and specifications subject to change without notice





BASE STATION for SMART WI-FI MINI SMOKE ALARM (XS01-M) SBS50 base station



Centralized device management via the X-Sense app

FEATURES

- Base Station can connect to up to 50 devices
- Extended transmission wireless range up to 2,200 ft (600 m)
- Easily connect to smartphone app via a 2.4GHz Wi-Fi network
- Easy app installation
- Receive real-time notifications on your phone
- Connected devices can be shared with up to 12 different app accounts
- 5-Year Warranty

TECHNICAL SPECIFICATIONS

Power Supply	Input: 100-240 V AC 50/60 Hz; Output: 5.0V-1.0 A
Best Operating Temperature	40-100 °F (4.4-37.8 °C)
Operating Relative Humidity	0- 85% RH (non-condensing)
Alarm Volume	100 dB
App	X-Sense Home Security (both Android and iOS supported)
Operating Frequency	US: 915 MHz; EU: 868.0-868.6 MHz (25mW e.r.p.) 869.25-869.3 MHz (10mW e.r.p.) 2400-2483.5 MHz (100 mW e.r.p.) 869.65-869.7 (25mW e.r.p.)
Wireless Frequency	2.4 GHz (incompatible with 5 GHz wi-fi network)
Wi-Fi Transmission Range	170 ft (50 m)
Wireless Protocol	IEEE 802.11b/g/n
Dimensions	3.5 x 3.5 x 1 inches (90 x 90 x 26.5 mm)
Weight	0.17 lb (78 g)

*Features and specifications subject to change without notice